


Current Project Construction Area (shown by the area the the thick red border) for the weeks of June 27th through approximately July 15th will be the installation of the water main on Oneida Ave. starting near Cleveland Drive.

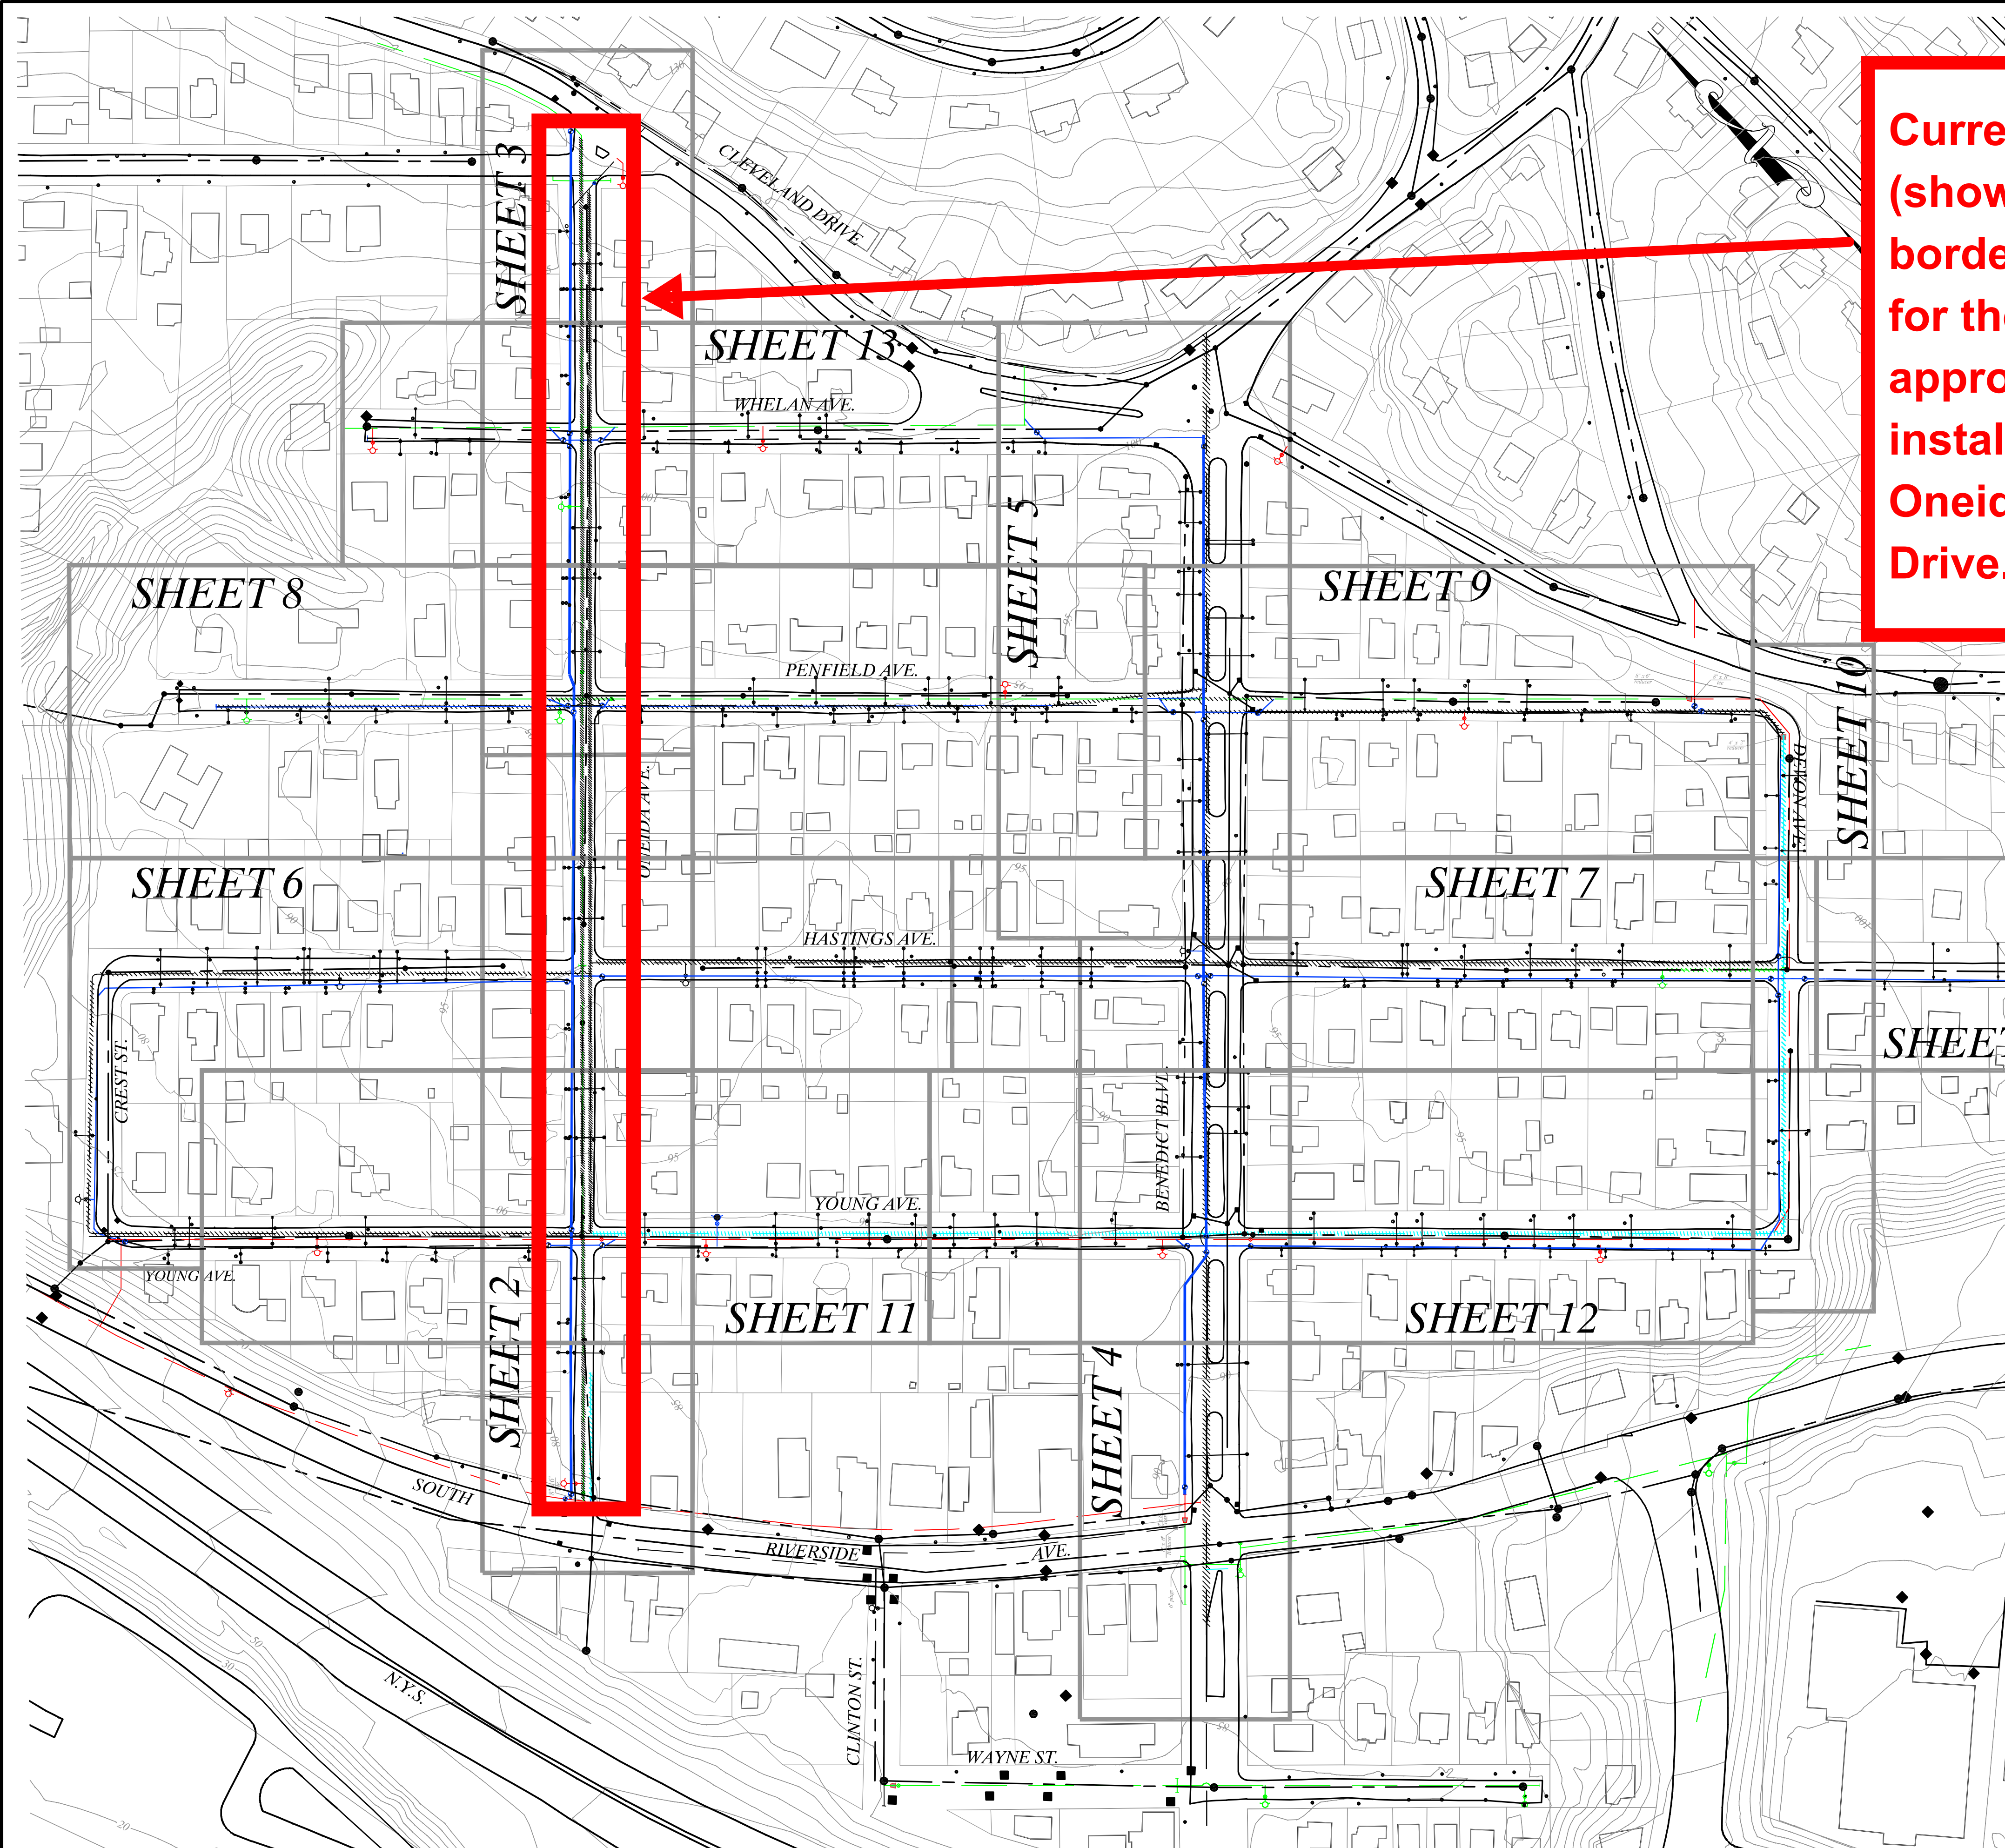

N/F HISTORIC HUDSON VALLEY
CONSTRUCTION STAGING AREA
SEE SPECIFICATIONS FOR
CONDITIONS OF USE

NOTES:

1. EXISTING TOPOGRAPHIC MAPPING FROM VILLAGE OF CROTON ON HUDSON GIS SURVEY.
2. EXISTING UTILITIES FROM VILLAGE OF CROTON ON HUDSON GIS SURVEY.
3. CONTRACTOR TO NOTIFY ALL UTILITY COMPANIES PRIOR TO START OF WORK TO FIELD LOCATE EXISTING UTILITIES.
4. PRIOR TO ANY CONSTRUCTION RELATED ACTIVITIES, THE CONTRACTOR SHALL COMPLY WITH INDUSTRIAL CODE RULE 53, TELEPHONE # 800-245-2828.
5. ALL PROPOSED WATER MAINS SHALL BE CEMENT LINED DUCTILE IRON PIPE, PRESSURE CLASS 54.
6. PROPOSED WATER SERVICE LOCATIONS ARE FOR ESTIMATING PURPOSES ONLY.
7. UNLESS OTHERWISE NOTED, ALL WATER SERVICES ARE TO BE 3/4" COPPER.

**PROPOSED WATER MAIN REPAIRS AND
IMPROVEMENTS TO THE VILLAGE OF CROTON
ON HUDSON WATER DISTRIBUTION SYSTEM**

VILLAGE OF CROTON ON HUDSON WESTCHESTER CO., N.Y.

Kellard Engineering & Consulting, P.C.
CIVIL ENGINEERS • SITE & ENVIRONMENTAL PLANNERS

500 Main Street • Armonk, N.Y. 10504
(914) 273-2323

5	APRIL 6, 2005
4	HEALTH DEPT. COMMENTS
3	JANUARY 31, 2005
2	HEALTH DEPT. APPLICATION
1	DECEMBER 15, 2004
1	VILLAGE COMMENTS
1	APRIL 5, 2004
1	W.C.H.D. COMMENTS
date:	MARCH 1, 2004
project no:	CRT 600

