


**Current Project Construction Area** (shown by the area the the thick red border) for the weeks of July 18th through approximately August 19th will be the installation of the water main on Benedict Blvd. between Cleveland Ave. and Riverside Ave.

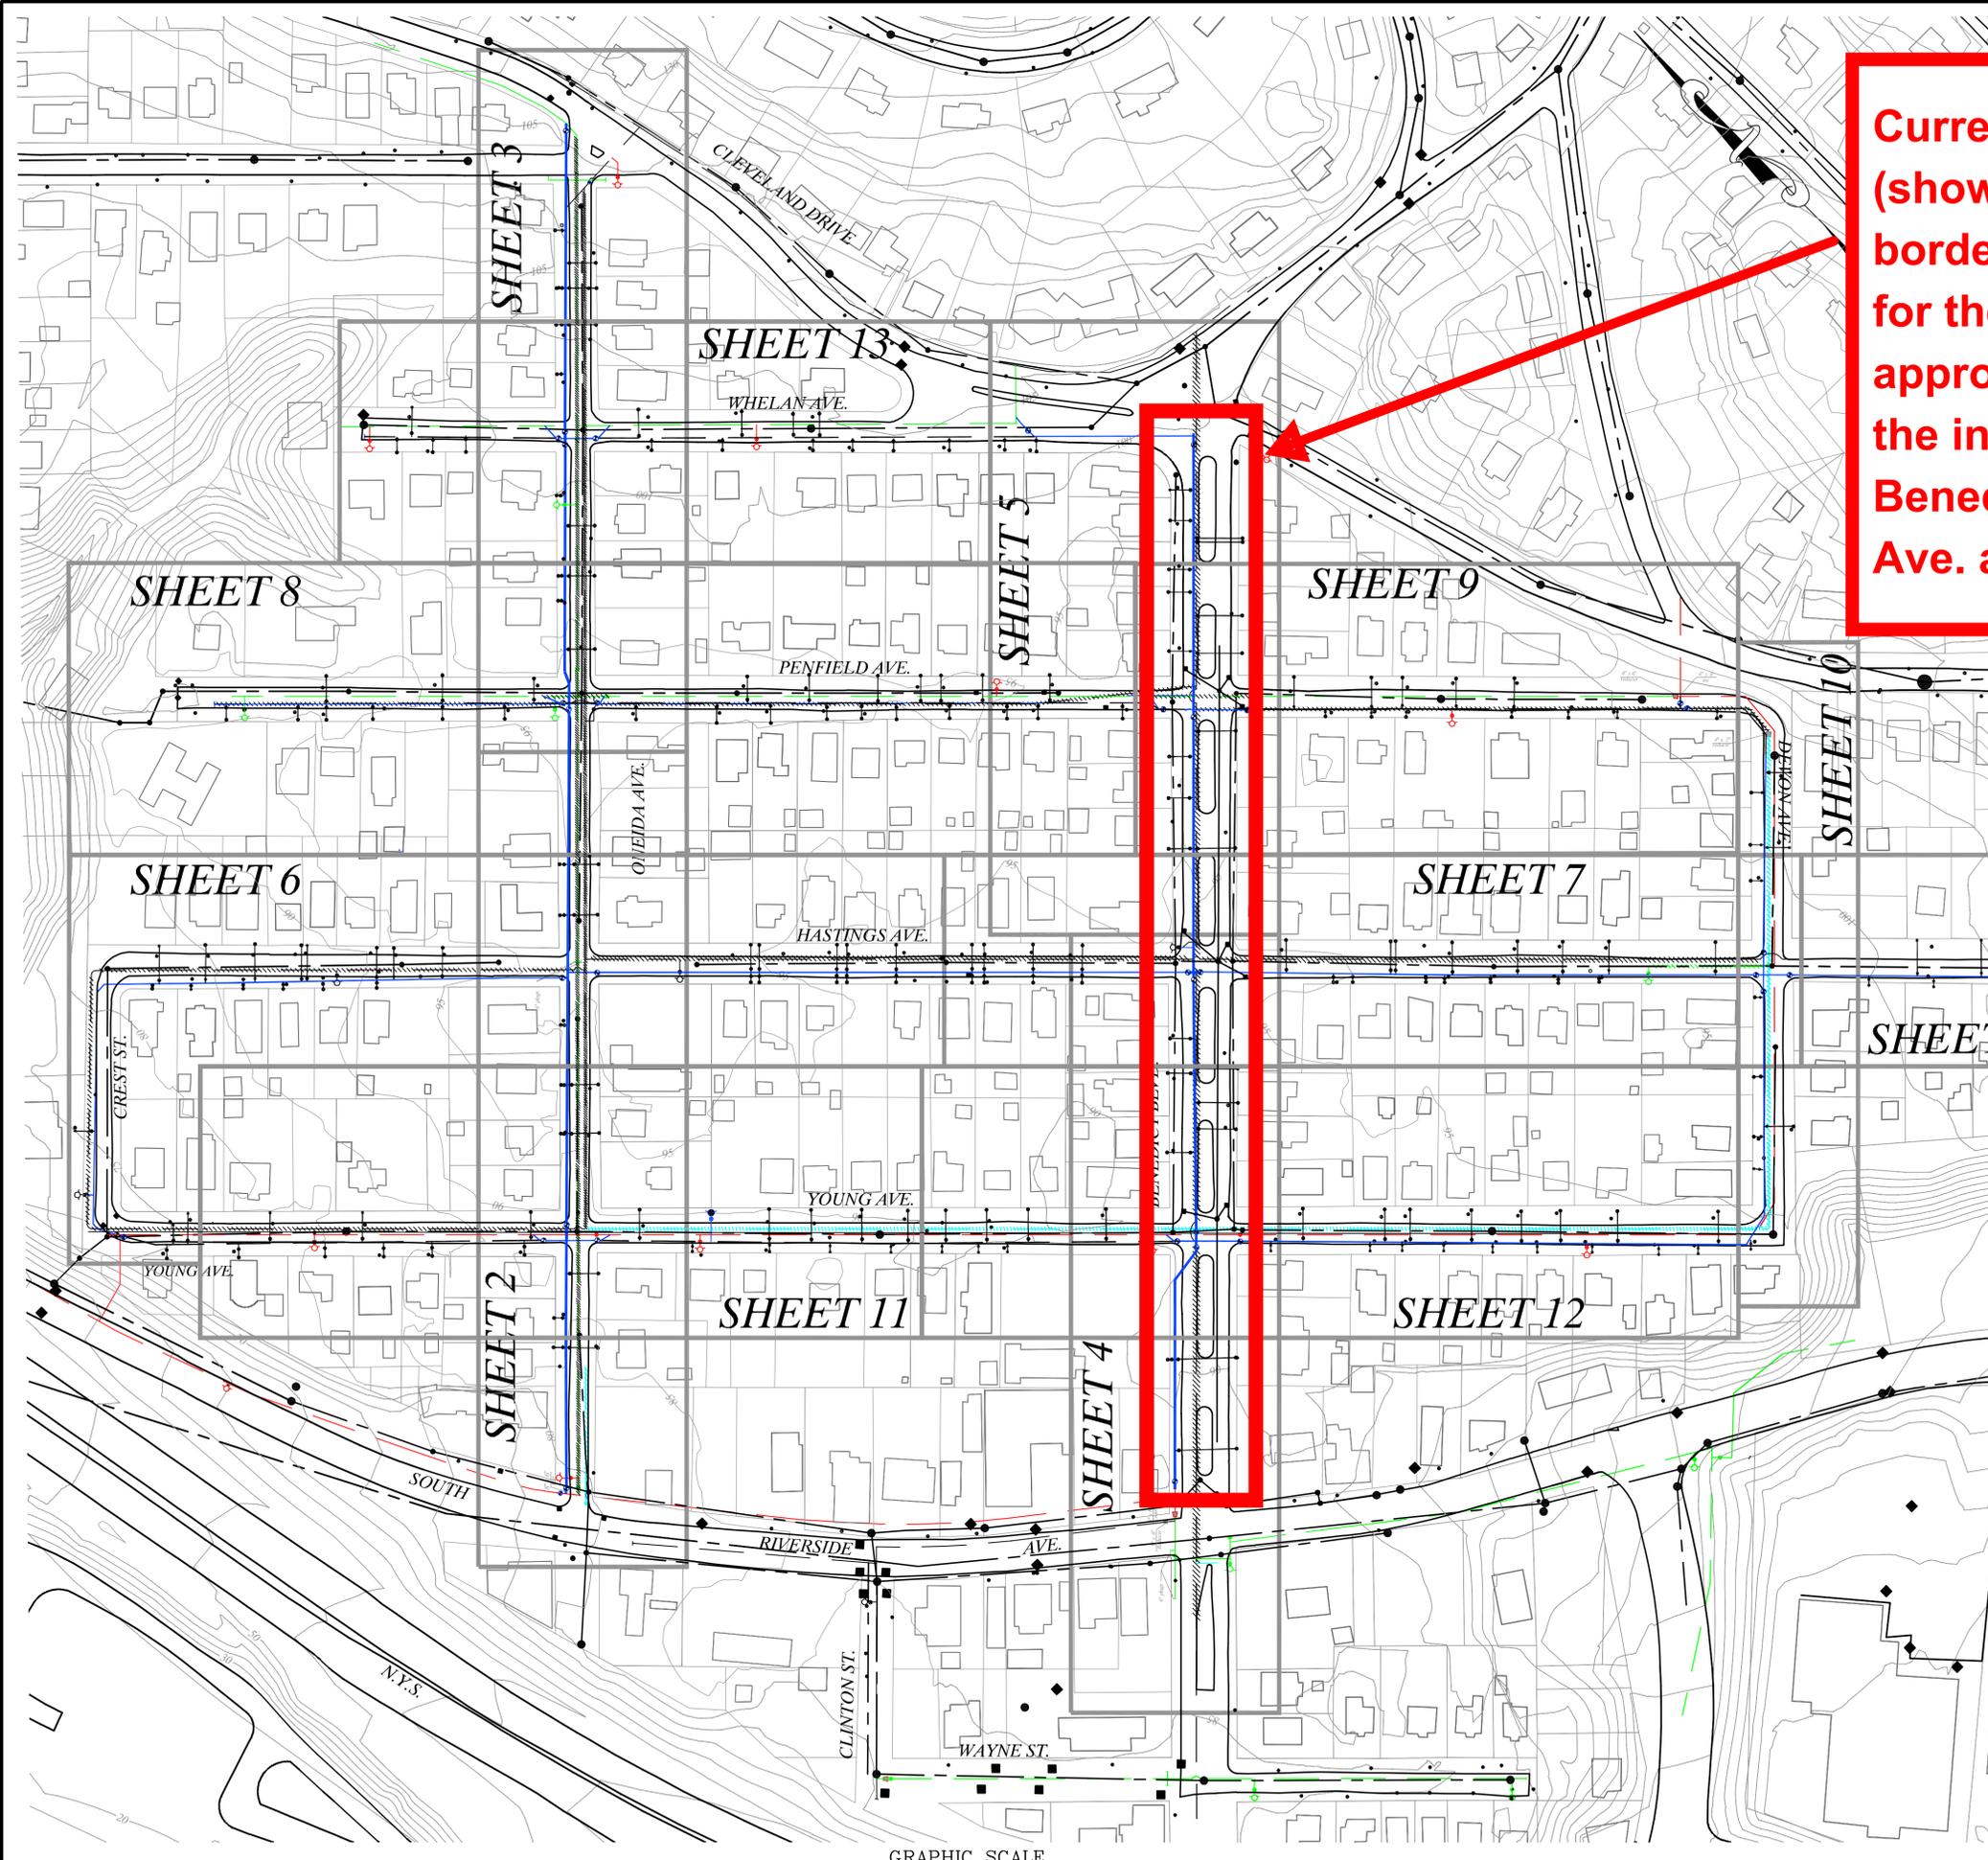

N/F HISTORIC HUDSON VALLEY  
CONSTRUCTION STAGING AREA  
SEE SPECIFICATIONS FOR  
CONDITIONS OF USE

- NOTES:
- EXISTING TOPOGRAPHIC MAPPING FROM VILLAGE OF CROTON ON HUDSON GIS SURVEY.
  - EXISTING UTILITIES FROM VILLAGE OF CROTON ON HUDSON GIS SURVEY.
  - CONTRACTOR TO NOTIFY ALL UTILITY COMPANIES PRIOR TO START OF WORK TO FIELD LOCATE EXISTING UTILITIES.
  - PRIOR TO ANY CONSTRUCTION RELATED ACTIVITIES, THE CONTRACTOR SHALL COMPLY WITH INDUSTRIAL CODE RULE 53, TELEPHONE # 800-245-2828.
  - ALL PROPOSED WATER MAINS SHALL BE CEMENT LINED DUCTILE IRON PIPE, PRESSURE CLASS 54.
  - PROPOSED WATER SERVICE LOCATIONS ARE FOR ESTIMATING PURPOSES ONLY.
  - UNLESS OTHERWISE NOTED, ALL WATER SERVICES ARE TO BE 3/4" COPPER.

**PROPOSED WATER MAIN REPAIRS AND IMPROVEMENTS TO THE VILLAGE OF CROTON ON HUDSON WATER DISTRIBUTION SYSTEM**

VILLAGE OF CROTON ON HUDSON WESTCHESTER CO., N.Y.

**Kellard Engineering & Consulting, P.C.**  
CIVIL ENGINEERS • SITE & ENVIRONMENTAL PLANNERS

500 Main Street • Armonk, N.Y. 10504  
(914) 273-2323

|             |                          |
|-------------|--------------------------|
| 5           | APRIL 6, 2005            |
| 4           | HEALTH DEPT. COMMENTS    |
| 3           | JANUARY 31, 2005         |
| 3           | HEALTH DEPT. APPLICATION |
| 2           | DECEMBER 15, 2004        |
| 2           | VILLAGE COMMENTS         |
| 1           | APRIL 5, 2004            |
| 1           | W.C.H.D. COMMENTS        |
| date:       | MARCH 1, 2004            |
| project no: | CRT 600                  |

UNAUTHORIZED ADDITIONS, MODIFICATIONS AND/OR ALTERNATIONS TO THESE PLANS IS A VIOLATION SECTION 7209(2) OF THE NEW YORK STATE EDUCATION LAW.

